


CURVY



STANDARD: LEDpanel



OPTIONAL:
LED-Globe E27 Socket

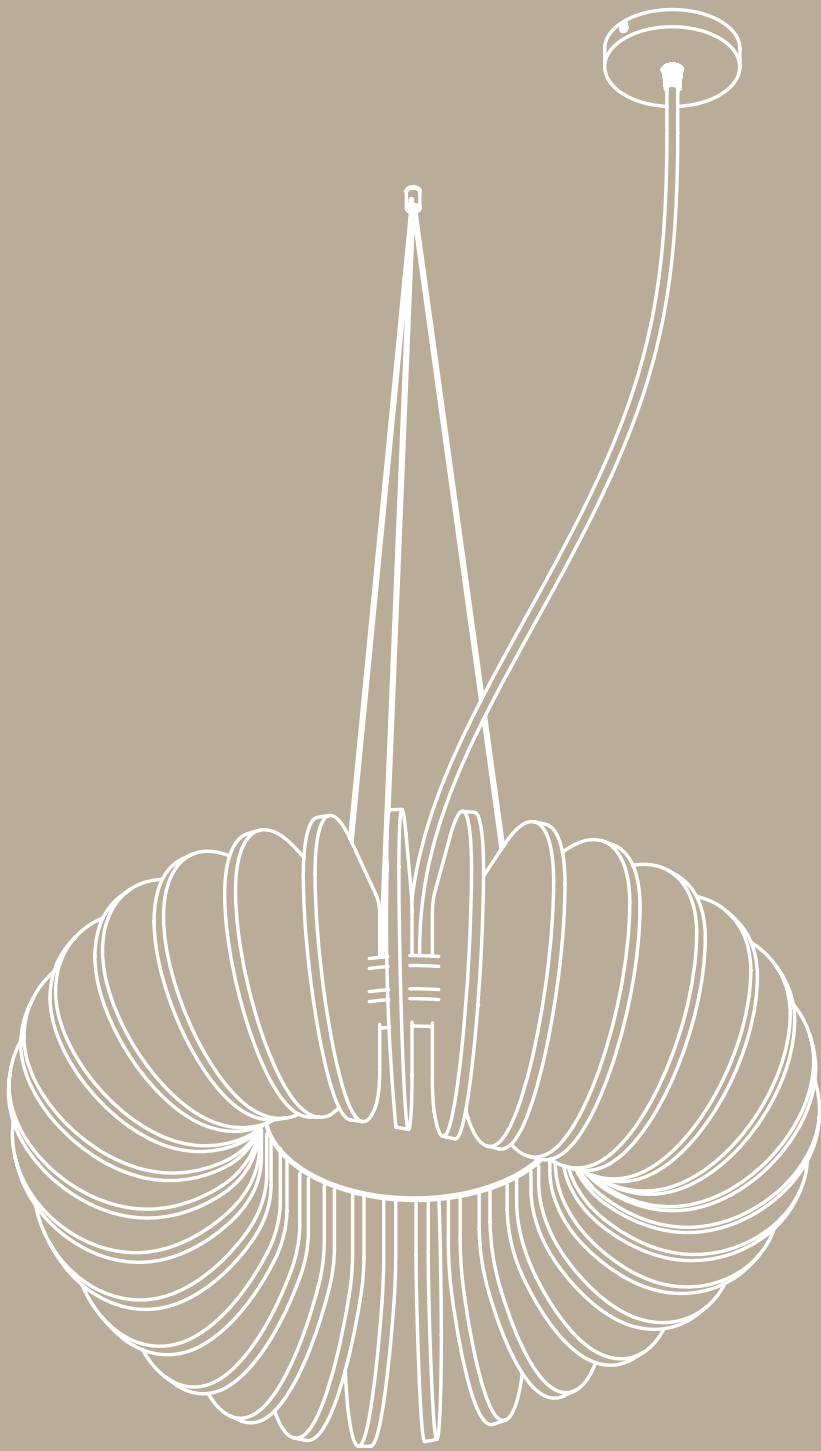

TECHNICAL SPECIFICATIONS CURVY



IP20

AC

230V



Input Voltage: AC85-265V, 50/60Hz

LED Power CURVY60: 24W (2160lm)
LED Power CURVY75: 24W (2160lm)
LED Power CURVY90: 28W (2520lm)

Efficiency(lm/w): 90lm/w

LED Type: SMD2835 (LEDpanel)

Color Rendering Index(CRI): 80 Ra

Dimensions CURVY60: Ø60x30cm
Dimensions CURVY75: Ø75x37cm
Dimensions CURVY90: Ø90x45cm
Cable length: 200cm

Control: LampSmartPro app/Remote



Ø60



Ø75



Ø90

TECHNICAL SPECIFICATIONS PETBOARD

Composition: 100% PET (> 70% recycled PET)
Thickness: 9mm
Density: 210kg/m3
Weight: 1900g/m2 (± 2%)
Number of PET-bottles: 55/m2

PETpanel colors: 33

Fire test EN 13501-1: B-S1, d0

Sound-absorbing surface CURVY60: 1,13m2 (± 5%)
Sound-absorbing surface CURVY75: 1,75m2 (± 5%)
Sound-absorbing surface CURVY90: 2,55m2 (± 5%)

Sound absorption petboard aw/m2: 0,25
Sound absorption petboard NRC/m2: 0,30



DESIGNS TRACKER

© 2025 Designstracker. All rights reserved



DESIGNS TRACKER

© 2025 Designstracker. All rights reserved

