


SPACE



STANDARD: LEDpanel

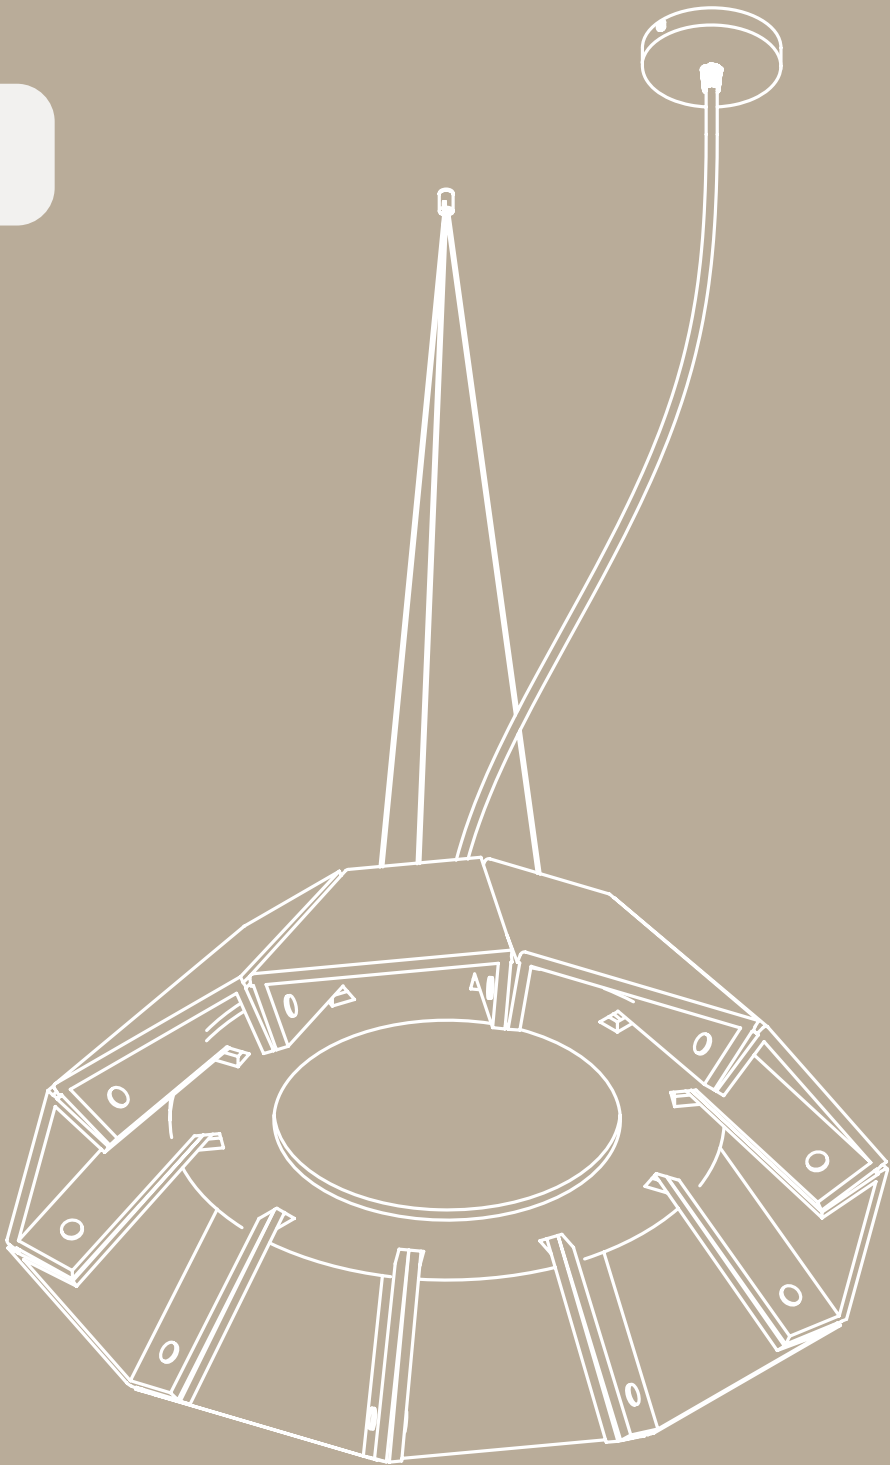

TECHNICAL SPECIFICATIONS **SPACE**



IP20

AC

230V



120°



Input Voltage: AC85-265V, 50/60Hz

LED Power SPACE65: 28W (2520lm)
LED Power SPACE85: 38W (3420lm)
LED Power SPACE110: 48W (4320lm)



Efficiency(lm/w): 90lm/w

LED Type: SMD2835 (LEDpanel)


Color Rendering Index(CRI): 80 Ra

Dimensions SPACE65: Ø65x30cm
Dimensions SPACE85: Ø85x40cm
Dimensions SPACE110: Ø110x50cm
Cable length: 200cm

Control: LampSmartPro app/Remote

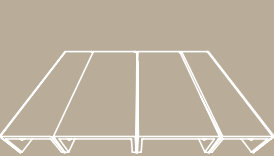

Ø65

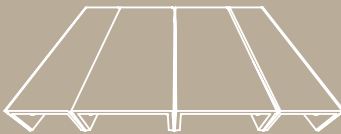

Ø85



Ø110

TECHNICAL SPECIFICATIONS **PETBOARD**

Composition: 100% PET (> 70% recycled PET)
Thickness: 9mm
Density: 210kg/m3
Weight: 1900g/m2 (± 2%)
Number of PET-bottles: 55/m2

PETpanel colors: 33

Fire test EN 13501-1: B-S1, d0

Sound-absorbing surface SPACE65: 1,17m2 (± 5%)
Sound-absorbing surface SPACE85: 2,20m2 (± 5%)
Sound-absorbing surface SPACE110: 3,63m2 (± 5%)

Sound absorption petboard α_w /m2: 0,25
Sound absorption petboard NRC/m2: 0,30



DESIGNS TRACKER

© 2025 Designstracker. All rights reserved



DESIGNS TRACKER

© 2025 Designstracker. All rights reserved