


SOLIS



STANDARD: LEDpanel



OPTIONAL:
LED-Globe E27 Socket

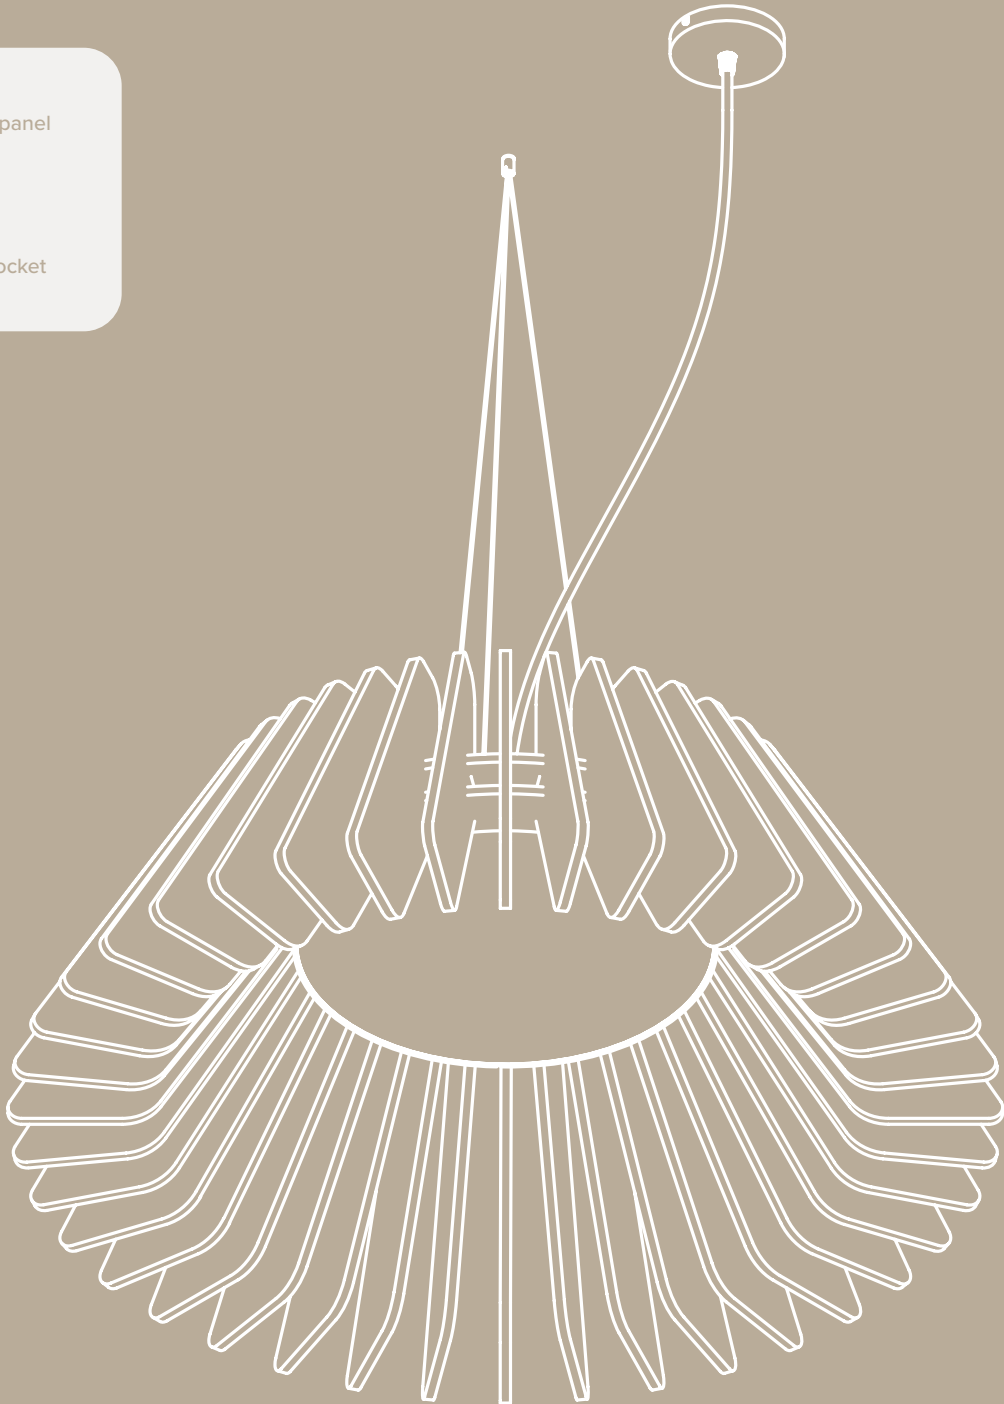

TECHNICAL SPECIFICATIONS SOLIS



IP20

AC

230V



120 °



Input Voltage: AC85-265V, 50/60Hz

LED Power SOLIS50: 24W (2160lm)
LED Power SOLIS70: 28W (2520lm)
LED Power SOLIS90: 38W (3420lm)
LED Power SOLIS110: 48W (4320lm)

Efficiency(lm/w): 90lm/w

LED Type: SMD2835 (LEDpanel)

Color Rendering Index(CRI): 80 Ra

Dimensions SOLIS50: Ø50x20cm
Dimensions SOLIS70: Ø70x25cm
Dimensions SOLIS90: Ø90x33cm
Dimensions SOLIS110: Ø110x41cm
Cable length: 200cm

Control: LampSmartPro app/Remote




3000K CCT-DIM 6000K



3000K



4000K



6000K



Ø50



Ø70



Ø90



Ø110

TECHNICAL SPECIFICATIONS PETBOARD

Composition: 100% PET (> 70% recycled PET)
Thickness: 9mm
Density: 210kg/m3
Weight: 1900g/m2 (± 2%)
Number of PET-bottles: 55/m2

PETpanel colors: 33

Fire test EN 13501-1: B-S1, d0

Sound-absorbing surface SOLIS50: 0,71m2 (± 5%)
Sound-absorbing surface SOLIS70: 1,32m2 (± 5%)
Sound-absorbing surface SOLIS90: 2,20m2 (± 5%)
Sound-absorbing surface SOLIS110: 3,32m2 (± 5%)

Sound absorption petboard α_w /m2: 0,25
Sound absorption petboard NRC/m2: 0,30



DESIGNS TRACKER

© 2025 Designstracker. All rights reserved



DESIGNS TRACKER

© 2025 Designstracker. All rights reserved